
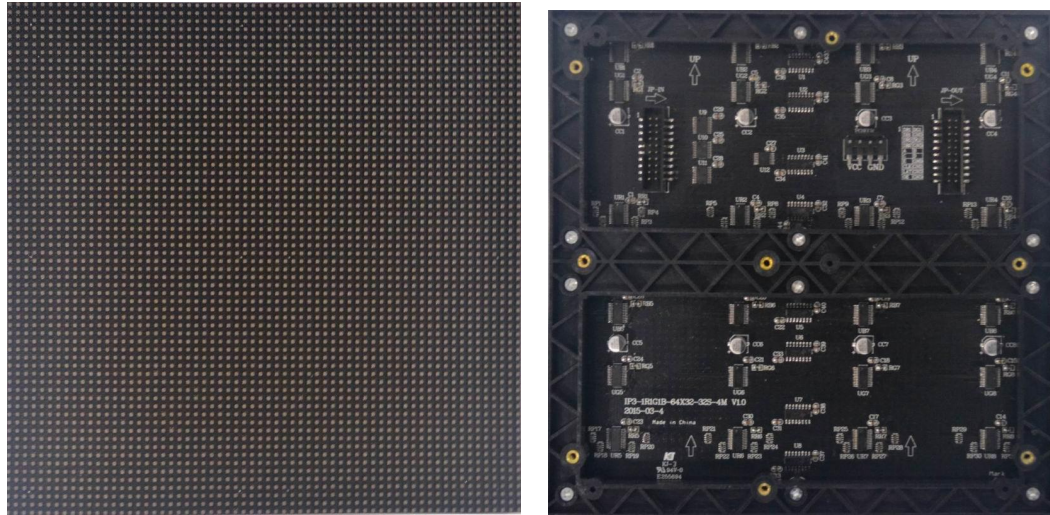
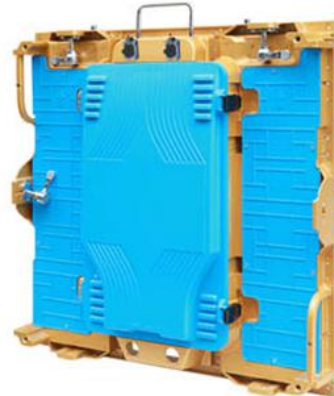


P3 Indoor Die-Casting Magnesium Light Weight Rental LED Display

Model		P3-IR16S-SMD2121-64x64-L576H576			
1. LED					
					
Color	Package	Intensity	Viewing angle	Wavelength	Testing condition
Red	SMD2121	260-320mcd	120/120	622.5-625nm	25 °C ,20mA
Green	SMD2121	400-550mcd	120/120	522.5-525nm	25 °C ,20mA
Blue	SMD2121	90-100mcd	120/120	465-467.5nm	25 °C ,20mA

2. LED Module	
	
Pixel Pitch	3
Pixel configuration	SMD2121 Black
Density	111111 pixels/m ² (real pixel)
Module Resolution	64(L) * 64(H)
Module Dimension	192(L) * 192(H) * 20(D)
Driving Mode	Constant current, 1/16 duty
Module Mask	Pure black mask---high contrast screen

3. LED Cabinet



576x576 Die-Casting Magnesium Cabinet

Module Quantity in a Cabinet	3(L) * 3(H)
Cabinet Dimension	576(L) * 576(H) * 75(D)mm
Cabinet Resolution	192(L) * 192(H)
Cabinet Material	Steel; Aluminum
Cabinet Weight	≈7KG

4. Electricity Parameter

Optical Ratings

Brightness	≥1200 cd/m ²
Viewing Angle	120°(Horizontal); 120°(Vertical)
Best Viewing Distance	≥3m
Gray Grade	16384 levels for each color
Display Color	4,398,046,511,104
Brightness Adjustment	100 grades by software or automatically by sensor

Power Supply

Operation Power	AC100-240V 50-60Hz Switchable
Max. Power Consumption	1100 W/m ²
Average Power Consumption	≈400 W/m ²

Control System

Correction Scale Level	13bits
Frame Frequency	≥60Hz
Screen Refresh Frequency	≥1920Hz
Gamma Correction	-5.0~5.0
Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
Control Distance	100m(Ethernet cable); 20KM(optical fiber cable)
Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200



SHENZHEN EAGER LED CO., LTD.

LED Display Factory Web: www.eagerled.com

Color Temperature	5000—9300 adjustable
Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet
Reliability	
Working Temperature	-20~+60 °C
Stored Temperature	-30~+70 °C
Working Humidity	10%~90% RH
Lifetime	100,000 hours
MTBF	5000 hours
Continuous Working Time	≥72 hours
Protection Grade	IP43
Out of Control Pixel Rate	≤0.01%