
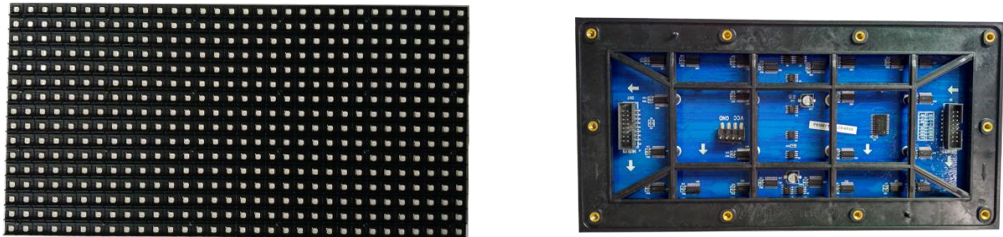
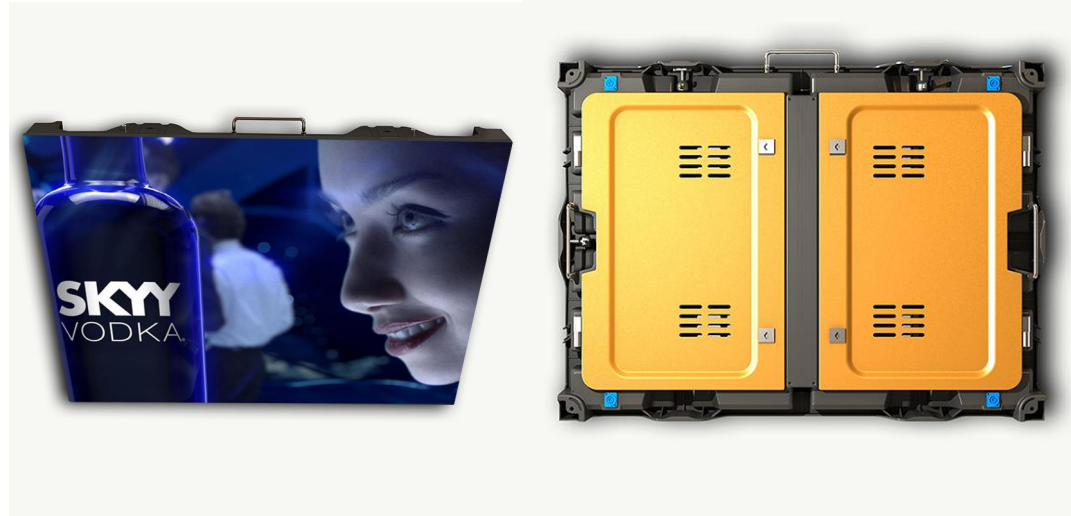


## P5 Outdoor Die-Casting Magnesium Light Weight Rental LED Display

<b>Model</b>		<b>P5-OR8S-SMD3535-32x16-L1024H768</b>			
<b>1. LED</b>					
					
Color	Package	Intensity	Viewing angle	Wavelength	Testing condition
Red	SMD2121	260-320mcd	120/120	622.5-625nm	25 °C ,20mA
Green	SMD2121	400-550mcd	120/120	522.5-525nm	25 °C ,20mA
Blue	SMD2121	90-100mcd	120/120	465-467.5nm	25 °C ,20mA

<b>2. LED Module</b>	
	
Pixel Pitch	8
Pixel configuration	SMD3535
Density	15,625 pixels/m <sup>2</sup> (real pixel)
Module Resolution	32(L) * 16(H)
Module Dimension	256(L) * 128(H) * 13(D)
Driving Mode	Constant current, 1/4 duty
Module Mask	Pure black mask---high contrast screen

<b>3. LED Cabinet</b>	



1024x768mm Die-Casting Magnesium Cabinet

Module Quantity in a Cabinet	3(L) * 6(H)
Cabinet Dimension	1024(L) * 768(H) * 85(D)mm
Cabinet Resolution	128(L) * 96(H)
Cabinet Material	Die-Casting Magnesium
Cabinet Weight	≈19KG

#### 4. Electricity Parameter

Optical Ratings	
Brightness	≥6000 cd/m <sup>2</sup>
Viewing Angle	120°(Horizontal); 120°(Vertical)
Best Viewing Distance	≥8m
Gray Grade	8096 levels for each color
Display Color	530,654,068,736 color
Brightness Adjustment	100 grades by software or automatically by sensor
Power Supply	
Operation Power	AC100-240V 50-60Hz Switchable
Max. Power Consumption	850 W/m <sup>2</sup>
Average Power Consumption	≈290 W/m <sup>2</sup>
Control System	
Correction Scale Level	13bits
Frame Frequency	≥60Hz
Screen Refresh Frequency	≥1920Hz
Gamma Correction	-5.0~5.0
Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
Control Distance	100m(Ethernet cable);



# SHENZHEN EAGER LED CO., LTD.

LED Display Factory    Web: [www.eagerled.com](http://www.eagerled.com)

	20KM(optical fiber cable)
Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200
Color Temperature	5000—9300 adjustable
Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet
<b>Reliability</b>	
Working Temperature	-20~+60 °C
Stored Temperature	-30~+70 °C
Working Humidity	10%~90% RH
Lifetime	100,000 hours
MTBF	5000 hours
Continuous Working Time	≥72 hours
Protection Grade	IP65
Out of Control Pixel Rate	≤0.01%